

[illegible]

TED-0004442
ACSEVB-EZ7-37220-100B5
Originator: E. Theberge

Revision Control
Page 2 of 5

Rev 1
11/10/2023

This page left intentionally blank.

TED-0004442-ASY
ACSEVB-EZ7-37220-100B5
Originator: E. Theberge

Assembly Instructions
Page 3 of 5

Rev 1
11/10/2023

1. RoHS Compliance Required?
Yes.
2. All soldering must meet the criteria for Class II or better per
IPC-A-610 Solder Joint Acceptance Criteria.
3. All assemblies to be cleaned of flux residues and other contaminants.
4. Visual quality inspection expected on all completed assemblies.
5. Functional testing not required unless otherwise specified below.
6. Completed assemblies to be shipped in ESD bags.
7. All component substitutions to be approved by Allegro.
8. Other Allegro Specifications required for build:
None.
9. Are there optional ways to build this TED pack?
No.

Assembly:


1. Install all SMT parts.
If Allegro supplies SMT devices they may be installed at this time.

Please note: the Allegro sensor may be installed at the same time as all other parts!

It is listed separately for ease of documentation.

[This TED # is used to build multiple other items.]

2. Install any thro-hole Keystone testpoints (if applicable).
Testpoint loops shall be installed in this orientation:

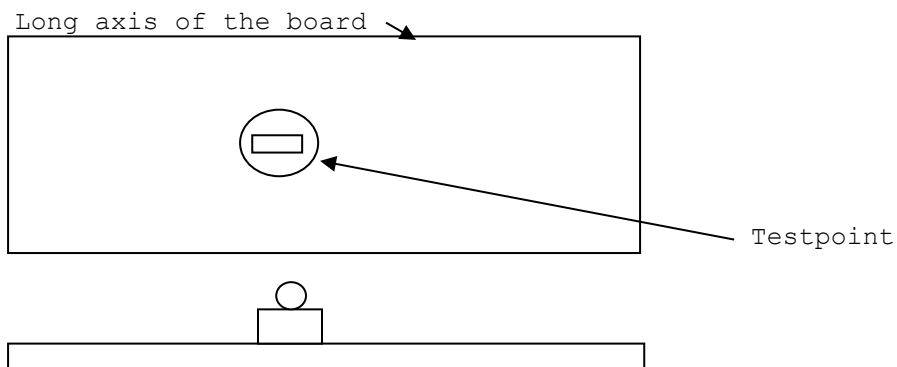

Note: loop is parallel to the long axis of the board.

If board is square or round then align testpoints in same direction.


3. 18g jumper for scope ground (if used):

TED-0004442-ASY
ACSEVB-EZ7-37220-100B5
Originator: E. Theberge

Assembly Instructions
Page 4 of 5

Rev 1
11/10/2023

Use 18g buss wire, 0.5 inch body, with 0.375 inch leads bent 90 degree.
Install 0.25 inch above PCB (not critical).
Solder and trim.
This component will be used for scope ground clips.

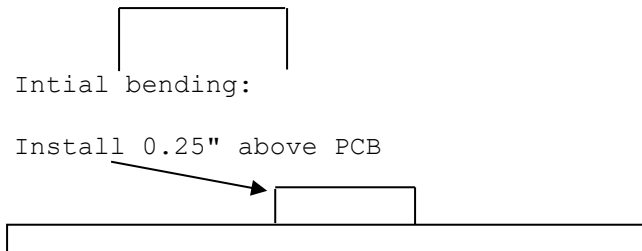

Labeling:

1. No labeling required.

TED-0004442
ACSEVB-EZ7-37220-100B5
Originator: E. Theberge


Bill of Materials
Page 5 of 5

Rev 1
11/10/2023


Item	Qty	S	Manufacturer	P/N	Description	Designator
1	1	10	Allegro	ACS37220LEZATR-100B5	IC, QFN7, sensor	U1
2	1	6	AVX	06035C104K4T2A	capacitor, 0603, mono, X7R, 50V, 100nF	C7
3	2	6	Yageo	YAG1307	RES 0 OHM JUMPER - 0603	RPU7, RPD5
4	1	6			Do Not Install	RPU3, RPU4, RPU5, RPU6
5	1	6			Do Not Install	RPD3, RPD4, RPD6, RPD7
6	1	6			Do Not Install	C3, C4, C5, C6
7	4	6	Keystone	5005	testpoint, thro, compact, for 62mil PCB, red	PIN3, PIN4, PIN5, PIN6, PIN7
8	1	10			PCB, as from TED-0004114 Rev 4 gerber files	PCB

RoHS compliant required
This BOM generated in conformance with PRC-0002193 Revision 0


A

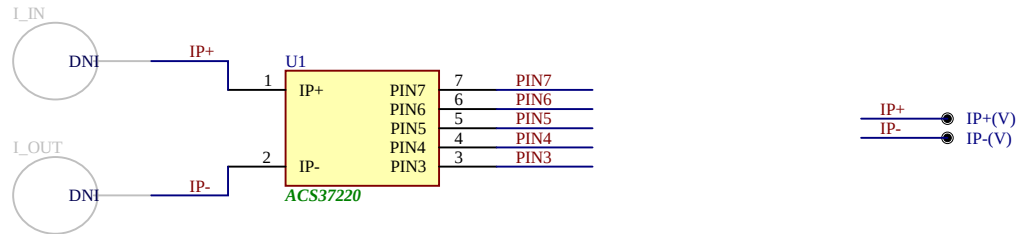

B

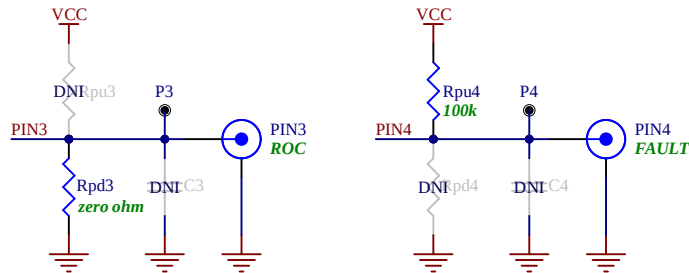

C

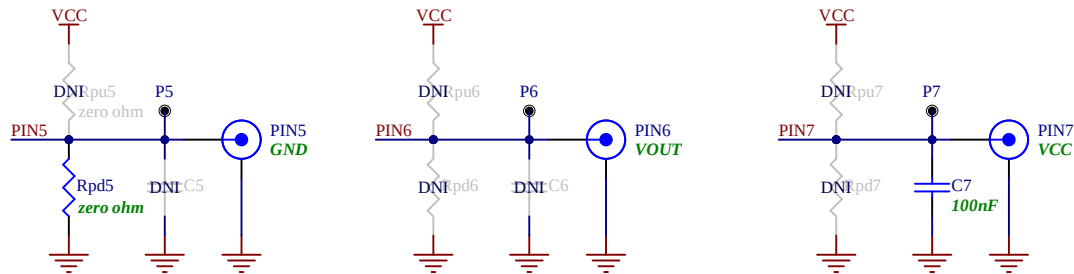

D

QR_CODE_1
<https://www.allegromicro.com/en/products/sense/current-sensor-ics>



Fiducial_1

Fiducial_2



Title: ACSEVB-EZ7		Assembly Variant: ACS37220	
Size: A	Number: TED-0004114-SCH	Revision: 1	Allegro MicroSystems 955 Perimeter Rd Manchester NH 03103
Date: 6/23/2023	Author: R. Krystian	Time: 6:00:56 PM	
File: TED-0004114.SchDoc	Sheet 1 of 1		